

Shelly[®] 3EM



- ✓ Precise 3-phase energy metering
- ✓ Up to 120A per phase
- ✓ Integrated 10A contactor control
- ✓ Solar and Wind power compatible
- ✓ Factory calibrated with over 99% accuracy
- ✓ DIN mountable
- ✓ Wi-Fi enabled
- ✓ Cloud and MQTT Enabled
- ✓ 365 days power consumption history
- ✓ Anti energy theft protection



Wi-Fi connected

Shelly 3EM can be connected to any Wi-Fi network or can operate as an Access Point.



Power supply

Each phase of Shelly 3EM must be 110-230V \pm 10, 50/60Hz AC



Monophase systems

Shelly 3EM can also monitor monophase electrical systems with up to 3 points simultaneously.



Contactor control

Shelly 3EM has an integrated 10A relay output for contactor control.



Mobile app control

Turn Shelly 3EM on/off directly from your smartphone or tablet. You can manage Shelly 3EM's output from the Shelly Cloud app, MQTT or Rest API.



Overconsumption and overpower protection

Shelly 3EM can automatically turn off the whole circuit if consumption or energy (pre-paid energy option) reaches the set limit.



Embedded web server

Turn on/off Shelly 3EM's contactor output directly, without the need of any additional controller or hub.



Sunrise/sunset schedules

Shelly 3EM can automatically turn on/off the power based on the sunrise/sunset hours.



Weekly schedules


Choose a time and create custom daily schedules for your Shelly 3EM.

PROFESSIONAL 3-PHASE ENERGY METER

Shelly 3EM has integrated relay output which can be used for contactor control.

TECHNICAL SPECIFICATIONS

| | |
|---|--|
| Power supply | 110-230V ±10, 50/60Hz AC |
| Power metering | 3 channels, up to 12A each |
| Consumption history | 365 days built-in energy history (Wh) |
| Contactor control | Maximum load 10A |
| Complies with EU standards: | <ul style="list-style-type: none"> • RE Directive 2014/53/EU • LVD 2014/35/EU • EMC 2004/108/WE • RoHS2 2011/65/UE |
| Working temperature | -40°C ÷ 40°C |
| Radio signal power: | 1mW |
| Wireless/WiFi Protocol | 802.11 b/g/n (2.4 GHz) |
| Frequency: | 2400 – 2500 MHz |
| Operational range (depending on local construction): | <ul style="list-style-type: none"> • up to 50 m outdoors • up to 30 m indoors |
| Dimensions (HxWxL): | 39 x 36 x 17 mm |
| Electrical consumption: | < 1 W |
| Additional features | <ul style="list-style-type: none"> • Overpower shutdown • Consumption limit |

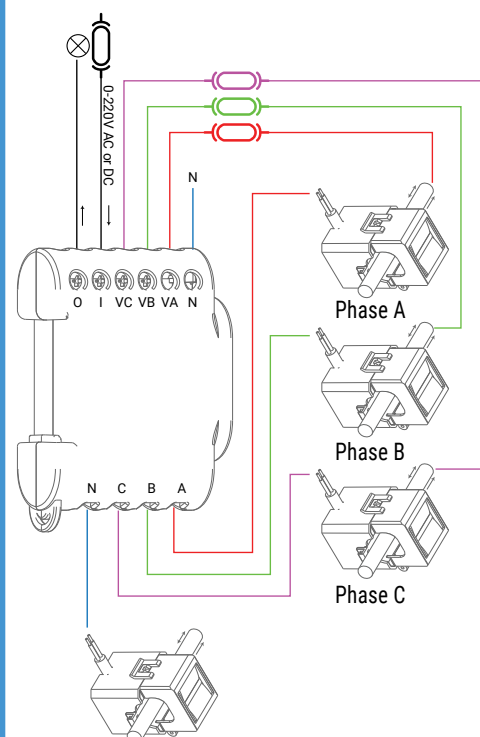

Phase N - optional and allows for detect theft or energy leakage.